


**DAHLBERG LIGHT AND POWER
RESIDENTIAL UNDERGROUND SERVICE
SERVICE ENTRANCE LOCATED ON A BUILDING
GUIDELINE ONLY**

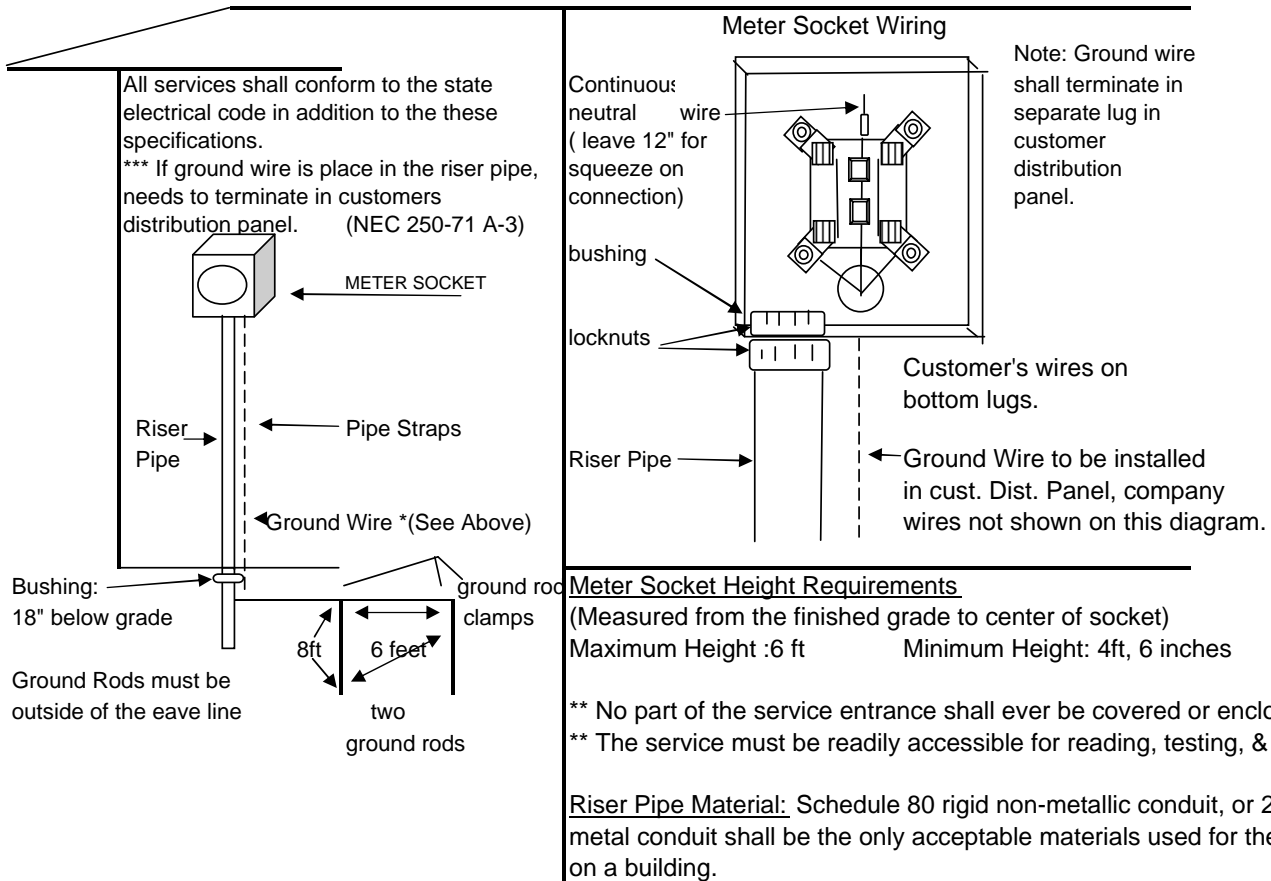

UNDERGROUND SERVICE METER SOCKET MINIMUM SIZE DIMENSION:

100 AMP: 14" X 12" X 4 3/8" TO MEET THIS SIZE DIMENSION, A SOCKET RATED AT 150 AMPS OR GREATER MAY HAVE TO BE PURCHASED.

150 OR 200 AMP: 14" X 12" X 4 3/8" SOCKET MUST BE RATED AT 200 AMPS.

NOTE: METER SOCKETS SHALL MEET THE MINIMUM SIZE DIMENSIONS INDICATED ABOVE UNLESS OTHERWISE APPROVED BY THE COMPANY PRIOR TO CONSTRUCTION OF THE SERVICE ENTRANCE.

***** THE SERVICE ENTRANCE CIRCUIT BREAKER ENCLOSURE IS TO BE LOCATED AT THE POINT WHERE THE SERVICE ENTRANCE CONDUCTORS ENTER THE BUILDING AND IT MUST BE DEAD FRONT AND 100 AMP MINIMUM. *****

This sheet sets forth the company specifications for your service entrance. Any modification from what is shown on this sheet shall be discussed with a representative of the company prior to your construction of your service.